A Donaldson Company

A WORLD LEADER IN FUME EXTRACTION TECHNOLOGY

PrintPRO 1500 iQ

PRINTING

Last Updated on 29.08.2018

The high end fume extraction system for wide format printers and the printing industry

BOFA's PrintPRO 1500 iQ high end extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance has now been further enhanced with the inclusion of several new features including BOFA's new iQ Operating System, making the new PrintPRO 1500 iQ one of the most advanced system available.

The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

More information about the Intelligent (iQ) Operating System.

Technology

- Intelligent (iQ) Operating System
- DeepPleat DUO pre filter
- HEPA filter
- Automatic flow control (AFC) technology
- Reverse flow air (RFA) technology
- Advanced carbon filter (ACF) technology
- Patented technology
- ProTECT service plan
- SureCHECK quality standard

Key features of the PrintPRO 1500 iQ

iQ Operating System
Standard

Reverse Flow Air technology
Standard

High airflow and pressure rates
Standard

DeepPleat DUO pre filter
Standard

Contact BOFA at **https://bofainternational.com/en/contact/**

https://bofainternational.com/en/portal/datasheets/printpro-1500-iq/

Combined HEPA/Gas filter incorporating ACF technology
Standard

Automatic Flow Control system
Standard

Independent filter condition monitoring, display and warnings
Standard

'Run safe' operation
Standard

VOC gas sensor (Volatile Organic Compound)
Optional

Filter change / System fail signal
Optional

Filters with long life and low replacement cost
Standard

Real time airflow reading
Standard

High contrast display
Standard

Remote diagnostics via USB
Standard

Remote stop / start interface
Optional

Interfacing
Optional

Technical Specification

1. IQ Display
2. On / Off switch
3. Power cable
4. Signal / interface cable
5. Castors
6. Door hinge
7. Hose inlet connection - 125mm
8. Exhaust outlet
9. Motor cooling inlet
10. Door latch
11. Motor cooling outlet
12. Standby button

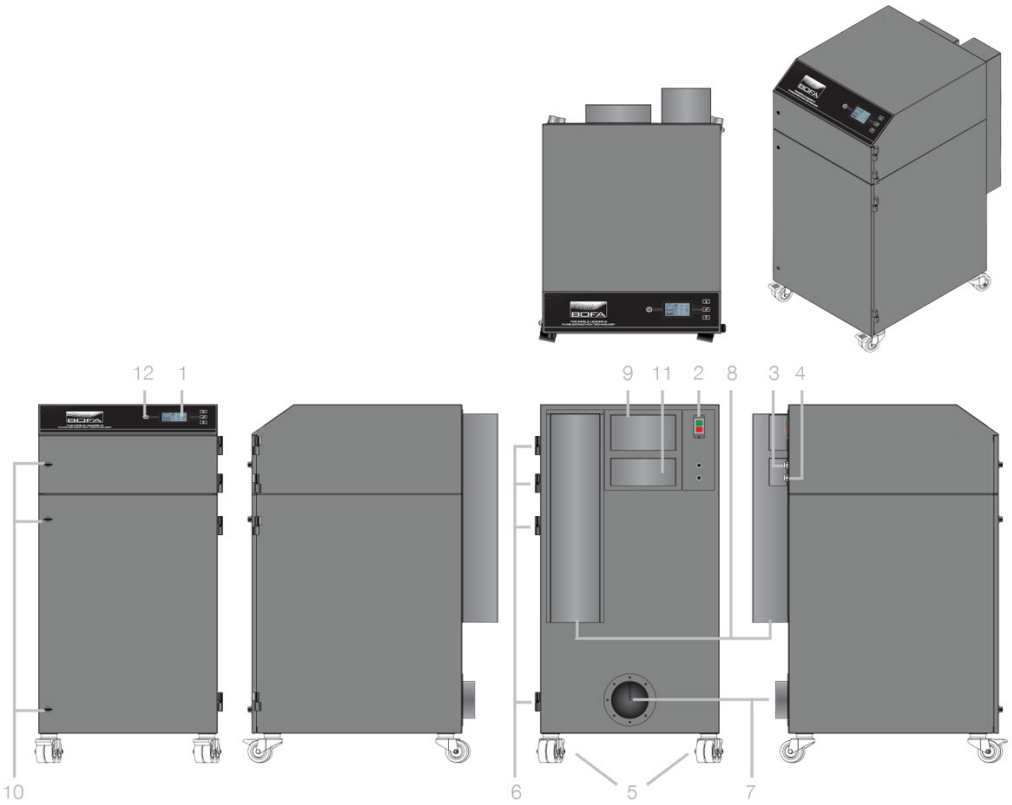

Airflow through filters

Technical data	
	EU
Dimensions (HxWxD)	1205 x 615 x 790mm (47.44 x 24.22 x 31.10”)
Cabinet construction	Brushed stainless steel / powder coated mild steel
Airflow / pressure	1250m³/hr (735cfm) / 100mbar
Electrical data	230v 1ph 50/60Hz Full load current: 24 amps / 3.3kw
Noise level	< 66dBA (at typical operating speed)
Weight	146kgs (322lbs)
Approvals	CE | cUL | UL

Deeppleat pre filter specifications	
Surface media area	30m² approx (322.8 ft²)
Filter media	Glass Fibre
Filter media construction	Maxi pleat Construction with Webbing Spacers
Filter media construction	Zintec mild steel
Filter housing	95% @ 0.9 microns
Inlet size	125mm (0.4 ft)
Dropout chamber size	58 litres
Filter media pleat size	200mm (0.65 ft)

Combined HEPA / Gas filter specifications	
Surface media area	7.5m² approx (80.7 ft²)
HEPA filter media	Glass fibre
HEPA media construction	Maxi pleat construction with webbing spacers
Filter housing	Zintec mild steel
Treated activated carbon	34kgs (74.8 lbs)

Combined HEPA / Gas filter specifications

Filter efficiency	99.997% @ 0.3 microns

Unit part numbers

Model	Voltage	Part no.
PrintPRO 1500 iQ powder coated	230V	L4472

Options

Model	Voltage	24V Stop / Start	Filter change / system failure signal	VOC monitoring
PrintPRO 1500 iQ powder coated	230V	A2001	A2002	A2003

Replacement filter part numbers

Model	Part no.	Combined HEPA / Gas filter
PrintPRO 1500 iQ	A1030222	A1030304

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOC's, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Think before you print! Please consider the environment before printing this document.